Dosamatic

EXA-02

- FLOW PROPORTIONAL DOSING UPTO 2%
- SUITABLE FOR NUTRIENTS DOSING
- COMPACT & STURDY DESIGN
- SUITABLE FOR OUTDOOR MOUNTING

From the makers of popular

edose® pumps

INITIATIVE® ENGINEERING

Dosamatic EXA-02

Technical Specifications

Min. Dosing Flow	-	1 lph
Max. Dosing Flow	-	30 lph
Min. Actuation Pressure	-	0.3 bar
Max. Actuation Pressure	-	5.0 bar
Pressure loss at max. flow	-	1.2 bar
Max. operating temperature	-	50 C
Inlet/Outlet Connections	-	3/4" BSPM
Dosing externally adjustable	-	0.5 to 2 %

Scope Of Supply

- Dosamatic Doser
- Wall/Tank Mounting Brackets
- Suction tubing with foot valve and filter.
- 3/4" hose adaptors
- Spares kit
- 'O & M' Manual

Examples Of Installation

Across valve/filter

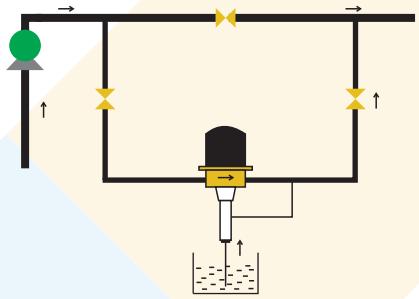

Across Pump

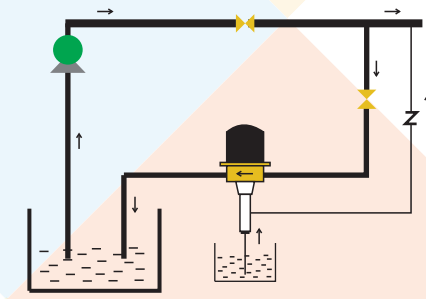

Separately powered

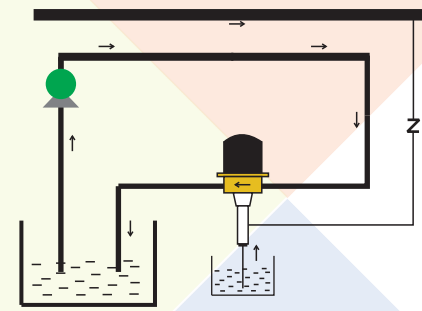

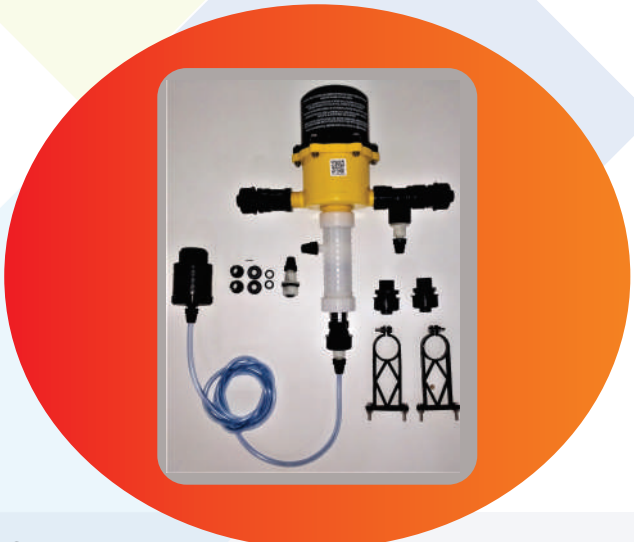

INITIATIVE ENGINEERING

Sr. No. 273, Near Vitthal Mandir, Bhatewara Nagar, Hinjawadi, Pune - 411 057, Maharashtra (India)

www.edose-pumps.com +91 788 788 7533 info@initiativeengineering.com